

EAA Electric Group

Electro-Pneumatic Positioner YT-1000R


Product Number: YT-1000R (specify your requirement)

Model	Acting Type	Explosion Proof	Lever Type	Orifice Type	Connection Type	Ambient Temp *	Option1	Option2 *
YT-1000R	S Single	m Ex dmb IIB T5 (KTL)	1 M6 × 34L	1 φ 1	1 PT	S -20℃ ~ 60℃	0 NONE (St'd)	0 NONE
	D Double	C Ex dmb IIC T5 (KTL)	2 M6 × 63L	2 φ 2	2 NPT	H -20℃ ~ 120℃	1 Dome Cover	1 + SPTM(Internal)
		i Ex ia IIB T6 (KTL)	3 M8 × 34L	3 None		L -40℃ ~ 70℃		2 + SPTM(External)
		n Non-Explosion	4 M8 × 63L					3 + L / S(Internal)
		f Ex dm IIB T5 (FM)	5 NAMUR					4 + L / S(External)
		P Ex ia IIC T6 (NEPSI)						5 + SPTM + L / S(Internal)
		H Ex dmb IIC T5/T6 (NEPSI)						6 + SPTM + L / S(External)

* With high temp and/or internal SPTM,L/S option, positioner must be non-explosion type.



Item · Type		Single	Double
Input Signal		DC 4-20mA	
Impedance		250 ± 15 Ω	
Supply Pressure		0.14~0.7MPa(1.4~7 bar)	
Stroke		0 ~ 90°	
Air Connection		PT(NPT) 1/4	
Gauge Connection		PT(NPT) 1/8	
Conduit		PF 1/2 (G1/2)	
Explosion Proof		Ex dmb IIB T5 (KTL) Ex dmb IIC T5 (KTL) Ex ia IIB T6 (KTL) Ex ia IIC T6 (NEPSI) Ex dmb IIC T5/T6 (NEPSI)	
Enclosure		IP66	
Ambient Temp	Operating	-20℃~70℃(-4~158°F)	
	Explosion	-20℃~60℃(-4~140°F)	
Linearity		± 1% F.S.	± 2% F.S.
Hysteresis		± 1% F.S.	
Sensitivity		± 0.2% F.S.	± 0.5% F.S.
Repeatability		± 0.5% F.S.	
Air Consumption		2.5LPM (sup=0.14MPa)	
Flow Capacity		80LPM (sup=0.14MPa)	
Material		Aluminum Diecasting	
Weight		2.8kg (6.2 lb)	

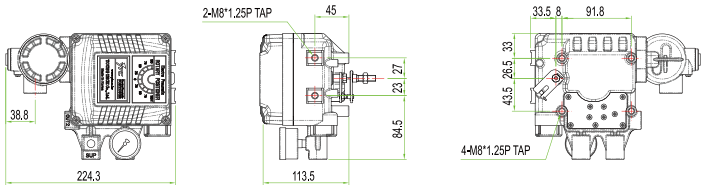

The Electro-Pneumatic Positioner YT-1000R is used for operation of pneumatic rotary valve actuators by means of electrical controller or control system with an analog output signal of DC 4 to 20mA or split ranges.