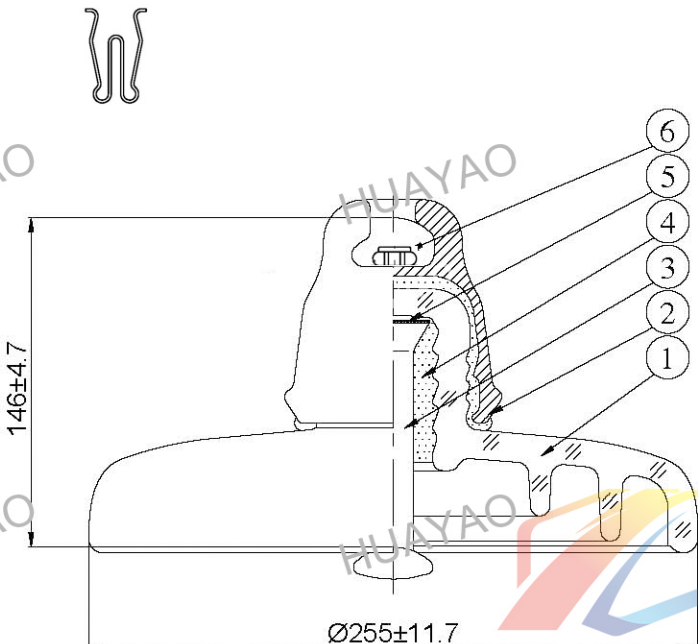


	1	2	3	4	5	6	7																					
A							A																					
B	1. 尺寸 Dimensions a) 盘径 Diameter (D): 255mm b) 结构高度 Spacing (H): 146mm c) 爬电距离 Creepage distance: 320mm d) 连接标记 Coupling size: 16 2. 机械性能 Mechanical Value a) 规定机械破坏负荷 Mechanical failing load: 120kN b) 逐个拉伸负荷试验 Individual tensile load tests: 60kN						B																					
C	3. 电气性能 Electric Value a) 工频湿耐受电压 Power frequency wet withstand voltage: 40kV b) 工频湿耐受电压 Power frequency wet withstand voltage (5pcs): 180kV c) 工频干耐受电压 Power frequency Dry withstand voltage: 70kV d) 雷电冲击干耐受电压 Dry lightning impulse withstand voltage: 100kV e) 雷电冲击干耐受电压 Dry lightning impulse withstand voltage (5pcs): 450kV f) 工频击穿耐受 Power frequency puncture withstand: 130kV 4. 无线电干扰 Radio Influence Voltage a) 对地试验电压 Test Voltage RMS to Ground: 10kV b) 在1000 kHz最大值 Maximum RIV at 1000 kHz: 50µV c) 电晕熄灭电压 Corona extinction voltage, 脚pin/帽Cap: 18/22kV d) 工频电弧实验 Power frequency arc test: 0.12s/20kA						C																					
D	注意 NOTE: 1. 交流系统用玻璃绝缘子元件应参照型式试验子元件的特性, 根据GB/T 7253-2019. GLASS INSULATOR UNITS FOR A.C. SYSTEMS - CHARACTERISTICS OF INSULATOR UNITS OF THE CAP AND PIN TYPE ACCORDING TO IEC 60305:2021. 2. 绝缘子串元件的球窝联接尺寸, 根据GB/T 4056-2019. DIMENSIONS OF BALL AND SOCKET COUPLINGS OF STRING INSULATOR UNITS ACCORDING TO IEC 60120:2020. 3. 金属镀层是: 钢铁制件热浸镀锌层技术要求及试验方法, 根据GB/T 1391-2022. METALLIC COATINGS - HOT DIP GALVANIZED COATINGS ON FABRICATED IRON AND STEEL ARTICLES - SPECIFICATIONS AND TEST METHODS ACCORDING TO ISO 1461:2022. 4. 交流系统用玻璃绝缘子元件定义、试验方法和判定准则, 根据GB/T 1001.1-2021. GLASS INSULATOR UNITS FOR A.C. SYSTEMS - DEFINITIONS, TEST METHODS AND ACCEPTANCE CRITERIA ACCORDING TO IEC 60383-1:2023.						D																					
E	<table><tr><th>No</th><th>描述 Description</th><th>材质 Material</th></tr><tr><td>6</td><td>销紧销 Split Pin</td><td>不锈钢R销 Stainless Steel R Clip</td></tr><tr><td>5</td><td>垫片 Gasket</td><td>沥青油毡 Asphalt Felt</td></tr><tr><td>4</td><td>胶合剂 Binding Material</td><td>硅酸盐水泥 Aluminous Cement</td></tr><tr><td>3</td><td>钢脚 Pin</td><td>锻钢, 热镀锌 Forged Steel, HDG</td></tr><tr><td>2</td><td>钢帽 Cap</td><td>铸铁, 热镀锌 Cast Iron, HDG</td></tr><tr><td>1</td><td>玻璃件 Glass Body</td><td>钢化玻璃 Toughened Glass</td></tr></table>						No	描述 Description	材质 Material	6	销紧销 Split Pin	不锈钢R销 Stainless Steel R Clip	5	垫片 Gasket	沥青油毡 Asphalt Felt	4	胶合剂 Binding Material	硅酸盐水泥 Aluminous Cement	3	钢脚 Pin	锻钢, 热镀锌 Forged Steel, HDG	2	钢帽 Cap	铸铁, 热镀锌 Cast Iron, HDG	1	玻璃件 Glass Body	钢化玻璃 Toughened Glass	E
No	描述 Description	材质 Material																										
6	销紧销 Split Pin	不锈钢R销 Stainless Steel R Clip																										
5	垫片 Gasket	沥青油毡 Asphalt Felt																										
4	胶合剂 Binding Material	硅酸盐水泥 Aluminous Cement																										
3	钢脚 Pin	锻钢, 热镀锌 Forged Steel, HDG																										
2	钢帽 Cap	铸铁, 热镀锌 Cast Iron, HDG																										
1	玻璃件 Glass Body	钢化玻璃 Toughened Glass																										
	1	2	3	4	5	6	7																					