

Ceiling Lights Specification Sheet

Surface mounted decorative LED ceiling lights in high purity aluminium, 15 W to 40 W.

Our ceiling range is for rooms that cannot take a suspended fixture: apartments with 2.4 to 2.6 m slab heights, corridors, guest rooms and offices with closed plasterboard ceilings. Three families cover the range, from the 40 mm deep SX2126 in three sizes up to the 900 x 900 mm SX2313-4C.




CEILING LIGHTS

High Purity Alu Ceiling Light SX2344-A

Crossed-bar aluminium ceiling light, 680 x 480 mm, 20 W, sand black and gold

Material	Aluminum +Iron+ silicone
Product Size	L680*W480*H mm
Available Colours	sand black +gold
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 Eaglerise driver 20 W
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen

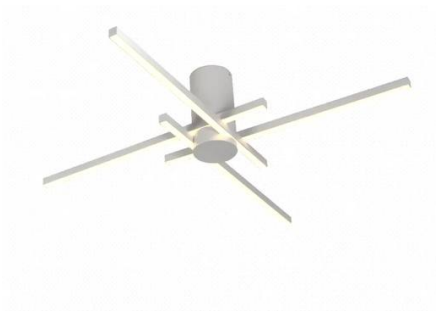

CEILING LIGHTS

High Purity Alu Ceiling Light SX2313-4C

900 x 900 mm crossed-bar ceiling light, 40 W, matt white, 2 kg

Material	Aluminum +Iron+Acrylic
Product Size	L900*W900*H200mm
Available Colours	Matt white
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 Eaglerise driver 40W
Product Weight	2 KG
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen



CEILING LIGHTS

High Purity Alu Ceiling Light SX2126-RS RM RL

Slim 40 mm ceiling light in three sizes, 15 W to 30 W, matt black, matt white or rose gold

Material	Aluminium + high quality silicone diffuser
Product Size	SX2126-RS L360*W280*H40mm / SX2126-RM L480*W400*H40mm / SX2126-RL L700*W600*H40mm
Available Colours	Matt black/ Matt white / Rose Gold
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 + Eaglerise driver 15W/20W/30W
Product Weight	0.8 KG/1.2KG/ 1.6KG
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen

Notes

- 0.8 kg to 2 kg, light enough for standard plasterboard fixings
- Silicone and acrylic diffusers, no visible diode pattern
- 3000K, 4000K and 6000K built to order on every model
- Epistar SMD2835 boards with named drivers, not unbranded electronics

Colour temperature is built to order per line item and cannot be changed after delivery. Production time is 20 days or less. Delivery time depends on the shipping mode chosen. Every piece is packed singly and our packing is verified by drop test.