

Decorative LED Lighting Catalogue

ZhongShan SongFangDa Lighting Co., Ltd | Zhongshan, Guangdong, China

SFD Lighting builds decorative LED fixtures in high purity aluminium: chandeliers and pendant lights, ceiling lights, floor lights, table lights and IP54 wall lights. Every fixture in this catalogue is made in our own factory in Zhongshan, from the aluminium extrusion and the sprayed finish through to the LED board, the driver and the export carton.

The team came out of established lighting manufacturers in Zhongshan and we run our own design and development department, so a model can be modified rather than only resold. Production time is 20 days or less on the models in this catalogue. Cartons are checked by drop test before a run ships.

Founded	2016
Employees	50 to 80
Markets Served	50+ countries
Production Time	20 days or less

Ceiling Lights

Surface mounted decorative LED ceiling lights in high purity aluminium, 15 W to 40 W.

Our ceiling range is for rooms that cannot take a suspended fixture: apartments with 2.4 to 2.6 m slab heights, corridors, guest rooms and offices with closed plasterboard ceilings. Three families cover the range, from the 40 mm deep SX2126 in three sizes up to the 900 x 900 mm SX2313-4C.




CEILING LIGHTS

High Purity Alu Ceiling Light SX2344-A

Crossed-bar aluminium ceiling light, 680 x 480 mm, 20 W, sand black and gold

SX2344-A is a surface-mounted ceiling light built from crossed high purity aluminium bars on a central hub. It covers a 680 x 480 mm footprint and draws 20 W, so it lights a bedroom, a study or a small meeting room from one point without a suspended structure. The bars are finished in sand black with gold detailing and the light output comes from Epistar SMD2835 diodes behind a silicone diffuser, driven by an Eaglerise driver.

Material	Aluminum +Iron+ silicone
Product Size	L680*W480*H mm
Available Colours	sand black +gold
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 Eaglerise driver 20 W
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen

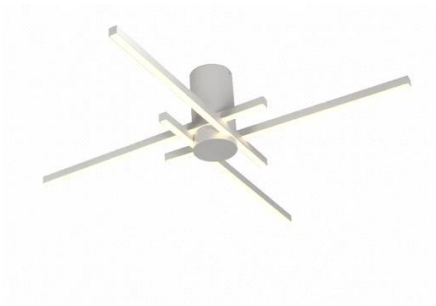

CEILING LIGHTS

High Purity Alu Ceiling Light SX2313-4C

900 x 900 mm crossed-bar ceiling light, 40 W, matt white, 2 kg

SX2313-4C is the 900 x 900 mm member of the crossed-bar ceiling family. Four aluminium arms meet at a central cylinder 200 mm deep, and the whole fixture weighs 2 kg, which keeps the fixing detail simple on a plasterboard ceiling. It runs at 40 W from Epistar SMD2835 diodes with an Eaglerise driver, and the matt white finish lets it disappear into a white ceiling when it is switched off.

Material	Aluminum +Iron+Acrylic
Product Size	L900*W900*H200mm
Available Colours	Matt white
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 Eaglerise driver 40W
Product Weight	2 KG
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen



CEILING LIGHTS

High Purity Alu Ceiling Light SX2126-RS RM RL

Slim 40 mm ceiling light in three sizes, 15 W to 30 W, matt black, matt white or rose gold

SX2126 is a slim surface ceiling light only 40 mm deep, supplied in three sizes from 360 x 280 mm at 15 W up to 700 x 600 mm at 30 W. The body is aluminium with a high quality silicone diffuser, so the lit surface is continuous and the fixture stays under 1.6 kg even in the largest size. Matt black, matt white and rose gold are standard, which lets one design run through a whole project at different room sizes.

Material	Aluminium + high quality silicone diffuser
Product Size	SX2126-RS L360*W280*H40mm / SX2126-RM L480*W400*H40mm / SX2126-RL L700*W600*H40mm
Available Colours	Matt black/ Matt white / Rose Gold
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 + Eaglerise driver 15W/20W/30W
Product Weight	0.8 KG/1.2KG/ 1.6KG
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen

Chandeliers and Pendant Lights

Ring, linear and multi-ring LED pendants from 400 mm to 1270 mm, 18 W to 75 W.

This is the largest part of our catalogue and the part most of our project work comes from. It covers single rings, intersecting rings, stepped multi-ring fixtures for double-height voids, straight and wave linear pendants, and the SD2126 up and down pendant with gesture dimming built into the fixture.




CHANDELIERS AND PENDANT LIGHTS

High Purity Alu Pendant Light SD2343-M

1270 mm linear wave pendant, 50 mm wide, 18 W, sand black and grey

SD2343-M is a 1270 mm linear pendant whose aluminium body curves in a shallow wave rather than running straight. It is only 50 mm wide and draws 18 W, so it sits over a dining table or a reception desk without blocking sight lines. The diffuser is PC, the body is aluminium with an iron suspension, and the drop is adjustable up to 1500 mm.

Material	Aluminum +Iron+ PC
Product Size	L 1270*W50*H1500mm
Available Colours	sand black +grey
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 Eaglerise driver 18W
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen

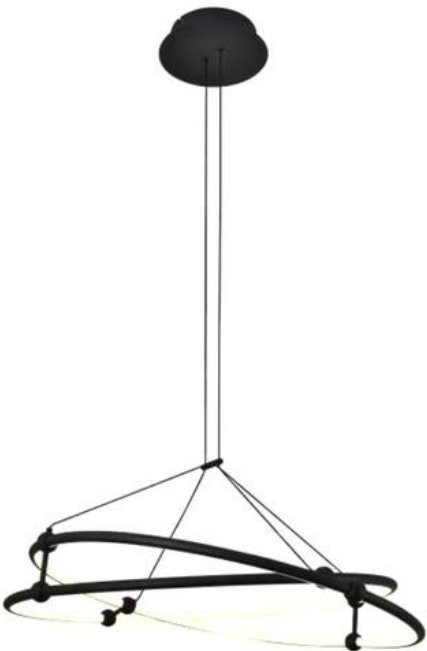

CHANDELIERS AND PENDANT LIGHTS

High Purity Alu Pendant Light SD2342-2RM

600 mm double ring pendant, 45 W, sand black, 1500 mm drop

SD2342-2RM is a 600 mm diameter pendant built from two intersecting aluminium rings on a single suspension. It runs at 45 W from Epistar SMD2835 diodes with a YSD driver and hangs to 1500 mm. The sand black finish and silicone diffuser keep the lit face matt rather than glossy, which matters when the fixture hangs at eye level over a stair or a void.

Material	Aluminum +Iron+ silicone
Product Size	Φ600*H1500mm
Available Colours	sand black
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 YSD driver 45W
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen



CHANDELIERS AND PENDANT LIGHTS

High Purity Alu Ceiling Light SX2342-2RS

400 mm surface ring ceiling light, 220 mm deep, 30 W, sand black

SX2342-2RS is the surface mounted member of the 2342 family: a 400 mm ring assembly 220 mm deep that fixes straight to the ceiling with no suspension. It runs at 30 W with a YSD driver behind a silicone diffuser, in sand black. It is the fixture to use when the room needs the same ring language as the SD2342 pendant but the ceiling is too low to hang anything.

Material	Aluminum +Iron+ silicone
Product Size	Φ400*H220mm
Available Colours	sand black
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 YSD driver 30W
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen




CHANDELIERS AND PENDANT LIGHTS

High Purity Alu Pendant Light SD2341-2RM

800 mm and 600 mm stepped double ring pendant, 75 W, grey and gold

SD2341-2RM hangs two rings, 800 mm and 600 mm, at different heights on one suspension, so the fixture builds a stepped silhouette in a tall space. At 75 W it is the highest output pendant in this range and is intended as the main light for a stair void or a double-height living room. The finish is grey with gold painting, and the diffuser is silicone over an aluminium body.

Material	Aluminum +Iron+ silicone
Product Size	Φ800+Φ600*H1500mm
Available Colours	grey + gold painting
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 YSD driver 75W
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen

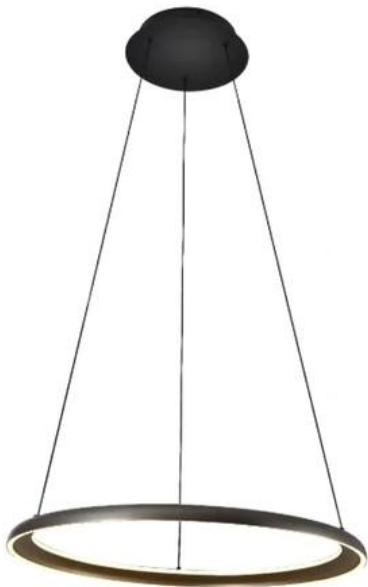

CHANDELIERS AND PENDANT LIGHTS

High Purity Alu Pendant Light SD2341-1RM

600 mm single ring pendant, 30 W, grey and gold, 1500 mm drop

SD2341-1RM is the single ring version of the 2341 family, 600 mm across at 30 W. It shares the grey body with gold painting and the silicone diffuser of the larger stepped model, so a project can use the 800 plus 600 mm fixture in the void and this one over side tables and bedrooms without a finish break. The suspension hangs to 1500 mm.

Material	Aluminum +Iron+ silicone
Product Size	Φ600*H1500mm
Available Colours	grey + gold painting
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 YSD driver 30W
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen



CHANDELIERS AND PENDANT LIGHTS

High Purity Alu Pendant Light SD2169-A

1200 mm straight linear pendant, 120 mm wide, 34 W, sand black

SD2169-A is a 1200 x 120 mm straight linear pendant in sand black with a PC diffuser. At 34 W it gives more output per metre than the slim wave models, which makes it the right choice when a linear pendant has to be the working light over a table or a counter rather than a decorative accent. The drop is 1500 mm.

Material	Aluminum +Iron+ PC
Product Size	L1200*W120* H1500mm
Available Colours	Sand black
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 Eaglerise driver 34W
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen



CHANDELIERS AND PENDANT LIGHTS

High Purity Alu Pendant Light SD2237-RM

600 mm matt gold ring pendant with acrylic diffuser, 36 W, drop 110 to 1500 mm

SD2237-RM is a 600 mm ring pendant in matt gold with an acrylic diffuser and a 36 W Epistar SMD2835 board on an Eaglerise driver. What separates it from the other 600 mm rings is the drop range: it can be hung as close as 110 mm to the ceiling or taken down to 1500 mm, so the same part number works as a near-ceiling fixture in a low room and as a table pendant in a tall one.

Material	Aluminum +Iron+Acrylic
Product Size	Φ600mm*H110-1500mm
Available Colours	Matt gold
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 Eaglerise driver 36W
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen



CHANDELIERS AND PENDANT LIGHTS

High Purity Alu Pendant Light SD2126-CL

1200 mm ring and bar pendant, matt white, 40 W, 2 kg

SD2126-CL combines a ring and a straight bar on one 1200 mm suspended frame, in matt white with an acrylic diffuser. It runs at 40 W from an Eaglerise driver and weighs 2 kg. The mixed geometry gives a long table two different light sources on one fixture: a diffuse ring and a directional line.

Material	Aluminum +Iron+Acrylic
Product Size	L1200xH1500mm
Available Colours	Matt white
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 Eaglerise driver 40W
Product Weight	2 KG
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen



CHANDELIERS AND PENDANT LIGHTS

SD2313-4C Aluminium Acrylic Pendant Light

900 x 900 mm crossed-bar pendant, 40 W, matt white, drop 200 to 1500 mm

SD2313-4C is the suspended version of the 2313 crossed-bar design: four aluminium arms across a 900 x 900 mm square, hung on an adjustable drop between 200 and 1500 mm. It weighs 2.5 kg and runs at 40 W with an Eaglerise driver behind acrylic diffusers. The wide drop range means it can sit just below a high ceiling or come down over a table.

Material	Aluminum +Iron+Acrylic
Product Size	L900*W900*H200-1500mm
Available Colours	Matt white
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 Eaglerise driver 40W
Product Weight	2.5 KG
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen



CHANDELIERS AND PENDANT LIGHTS

Up and Down Pendant Light With Gesture Dimming
SD2126-RS RM RL

Up and down pendant in three sizes with gesture dimming, 25 W to 55 W

SD2126 emits both upward and downward from a slim aluminium body with a high quality silicone diffuser, and it is dimmed by gesture rather than by a wall dimmer. Three sizes are available, from 360 x 280 mm at 25 W to 700 x 600 mm at 55 W, all on a 1500 mm drop. Because the dimming is built into the fixture, it can be retrofitted onto an existing switched circuit with no dimming wiring.

Material	Aluminium + high quality silicone diffuser
Product Size	SD2126-RS L360*W280*H1500mm / SD2126-RM L480*W400*H1500mm / SD2126-RL L700*W600*H1500mm
Available Colours	Matt black/ Matt white / Rose Gold
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 + Eaglerise driver 25W/38W/55W
Product Weight	1 KG/1.5KG/ 2KG
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen

Floor Lights

Upright and arc LED floor lights from 1300 mm to 2000 mm, 5 W to 80 W.

Floor lights solve the case where no ceiling work is possible: leased offices, heritage buildings, hotel lounges already fitted out, and rented apartments. Two SL2312 uprights dim from a button on the head, and the SL2243-5C five-arm arc lights a whole seating group at 80 W.



FLOOR LIGHTS

Simple Floor Light SL2243-5C

Five-arm arc floor light, 2000 mm high, chrome, 80 W

SL2243-5C is a five-arm arc floor light standing 2000 mm high on an 850 x 700 mm base footprint, finished in chrome. At 80 W it is the highest output fixture in this range and is intended to light a seating group from the side, where a ceiling fixture cannot be installed or a rented space does not allow ceiling work.

Material	Aluminum +Iron+ silicone
Product Size	L850*W700*H2000mm
Available Colours	Chrome
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 Eaglerise driver 80W
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen



FLOOR LIGHTS

Gesture Dimming Floor Light SL2312-2C

1365 mm upright floor light with top button dimming, Cree COB 10 W, 5 kg

SL2312-2C is a 1365 mm upright floor light with a metal body, aluminium head and PC diffuser. The on, off and dimming controls are a single button on the top of the head, so there is no inline cord switch to find. It uses a Cree COB source on a Waiberlon driver at 10 W and weighs 5 kg, which keeps it steady in a public space.

Material	Metal body + aluminium + PC, top button on off and dimming
Product Size	L200*W160 *H1365 mm
Available Colours	Matt black or any colors
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Cree Cob +Waiberlon driver 10 W
Product Weight	5 KG
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen



FLOOR LIGHTS

Gesture Dimming Floor Light SL2312-1C

1300 mm upright floor light with top button dimming, Cree COB 5 W, 3.1 kg

SL2312-1C is the compact member of the SL2312 family: 1300 mm high on a 150 x 150 mm base, 3.1 kg, with a Cree COB source at 5 W on a Waiberlon driver. Like the 2C it is switched and dimmed from a button on the top of the head. The smaller base makes it the version to use where floor space beside a chair or a bed is tight.

Material	Metal body + aluminium + PC, top button on off and dimming
Product Size	L150*W150 *H1300 mm
Available Colours	Matt black or any colors
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Cree Cob +Waiberlon driver 5W
Product Weight	3.1 KG
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen

Table Lights

Weighted decorative LED table lights for bedside and reception surfaces.

A table light lives on a polished surface next to a phone and a glass of water, so weight and footprint matter more than output. ST2308-RS is 2.2 kg on a 270 mm footprint at 5 W, which is a bedside and accent level rather than a working level.



TABLE LIGHTS

High Purity Alu Table Light ST2308-RS

515 mm table light, matt white, Cree-class 5 W, 2.2 kg

ST2308-RS is a 515 mm high table light with a 270 mm footprint, matt white, weighing 2.2 kg. It runs at 5 W from an Epistar SMD2835 board on an Eaglerise driver behind an acrylic diffuser. The weight is deliberate: a light table lamp slides on a polished surface and gets knocked off a bedside table.

Material	Aluminum +Iron+Acrylic
Product Size	L 270*H515 mm
Available Colours	Matt white
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	Epistar SMD2835 Eaglerise driver 5W
Product Weight	2.2 KG
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen

Wall Lights

IP54 rated aluminium LED wall lights in three lengths, 8 W to 24 W.

SB2167 is an IP54 wall light in 220 mm, 300 mm and 600 mm lengths, all 35 mm deep. The rating is the reason it exists: it can go on a bathroom mirror wall, a covered balcony or an entrance wall where a dry-room decorative fixture would fail within a year.



WALL LIGHTS

High Purity Aluminium Wall Light SB2167 IP54

IP54 aluminium wall light in three lengths, 8 W to 24 W, matt black matt white or gold

SB2167 is an IP54 rated wall light in three lengths, 220 mm, 300 mm and 600 mm, all 35 mm deep and 95 mm high. It uses a CREE LED board with a Done brand driver at 8 W, 12 W or 24 W by length, in an aluminium body with a high quality silicone diffuser. The IP54 rating means it can be used in bathrooms and covered outdoor areas, not only in dry rooms.

Material	Aluminium + high quality silicone diffuser
Product Size	SB2167-1S L220 *W35 *H95mm / SB2167-1M L300 *W35 *H95mm / SB2167-1L L600 *W35 *H95mm
Available Colours	Matt black/ Matt white / Gold
LED Colour Temperature	3000K/4000K/6000K
LED and Driver	CREE LED+Done brand driver 8W/12W/24W
Product Weight	1.2KG/ 1.8KG/2.5
Packaging	Single packaging per piece
Production Time	20 days or less
Delivery Time	Based on the mode of shipping chosen