

Copper Shot and Cut Wire

Brass at Cu 62% and red copper at Cu 99.9%, in round and as-cut form, for decorative and fitting surfaces that must keep their colour.

Size available	0.3 mm to 3.0 mm
Grades	Brass Cu 62% · Red copper Cu 99.9% · 180-250 HV
Standards	AMS 2431/8A, MIL-S-13165C, DIN 8201, VDFI 8001, SAE J441, DQML 001-2008
Products in range	2

Applications


- Valve and electric fitting manufacturers
- Decorative hardware and architectural metal producers
- Plants finishing brass and copper components before plating or lacquering

Advantages

- Golden bright appearance carried straight onto the workpiece
- Used for photic-tidy, aggrandizement, surface finishing and highlight colour
- Density of 8.6 g/cm³ gives strong impact energy at small grain sizes

Copper Cut Wire Shot As Cut

Brass Cu 62% and red copper Cu 99.9%, 0.3 mm to 3.0 mm, 180-250 HV

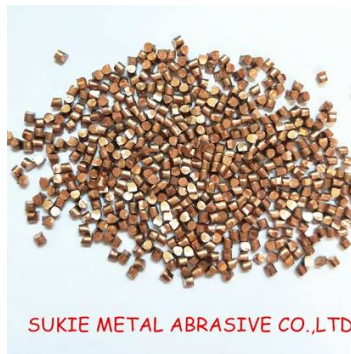

Place of Origin	China
Brand Name	SUKIE
Model Number	0.3-3.0 mm
Size available	0.3 mm to 3.0 mm, other sizes can be customized
Grain shape	As cut, cylindrical

Copper cut wire shot in the as-cut condition has a golden bright appearance.

It mainly applies to the surface of valves, electric fittings, decoration and other workpieces. It is used for photic-tidy, aggrandizement, surface finishing and highlight colour.

Chemical composition and specification

Product	Material	Cu	Zn	Density	Hardness	Test
Copper cut wire	Brass	62%	37.5%	8.6 g/cm ³	180-250 HV	Pass
Copper cut wire	Red copper	99.9%	0.003%	—	—	Pass

Chemical composition in %. Density and hardness are published against the brass row.

Commercial terms

Minimum Order Quantity	500 kg
Packaging Details	25 kg/bag, 40 bags/pallet
Payment Terms	T/T
Supply Ability	500,000 kg/month

Copper Shot Rounded

Brass Cu 62% and red copper Cu 99.9%, 0.3 mm to 3.0 mm, 180-250 HV



SUKIE METAL ABRASIVE CO.,LTD.

Place of Origin	China
Brand Name	SUKIE
Model Number	0.3 mm to 3.0 mm
Material	Copper 99.99%
Usage	Shot blasting, shot peening, surface treatment
Abrasive Grain Sizes	0.3 mm to 3.0 mm
Size available	0.3 mm to 3.0 mm, other sizes can be customized
Grain shape	Rounded

Copper shot has a golden bright appearance and a rounded shape.

It mainly applies to the surface of valves, electric fittings, decoration and other workpieces. It is used for photic-tidy, aggrandizement, surface finishing and highlight colour.

Chemical composition and specification

Product	Material	Cu	Zn	Density	Hardness	Test
Copper shot	Brass	62%	37.5%	8.6 g/cm ³	180-250 HV	Pass
Copper shot	Red copper	99.9%	0.003%	—	—	Pass

Chemical composition in %. Density and hardness are published against the brass row.

Commercial terms

Minimum Order Quantity	500 kg
Packaging Details	25 kg/bag, 40 bags/pallet
Delivery Time	3 days
Payment Terms	T/T
Supply Ability	500,000 kg/month

Ordering

Send the substrate, the grain size or target finish, your monthly tonnage and the destination port. WhatsApp +86 158 6926 6303 or email sale@sukiemetal.com.