


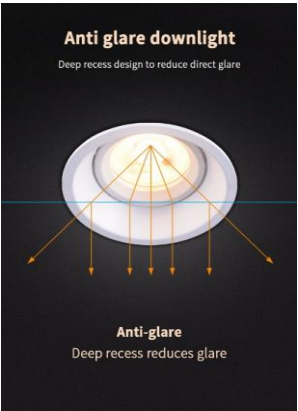

Recessed Anti-glare COB Downlight

Product Features & Advantage	1, Recessed installation, clean and neat appearance. 2, Anti-glare design, soft and comfortable light. 3, High-quality COB light source, uniform illumination. 3, die-casting aluminum housing, stable performance and extended product life. 4, Mercury-free & eco-friendly, no UV/IR radiation, safe for daily use. 5, Conform CE, RoHS, FCC, SAA, PSE certifications.
---	---

General data	General	Material	die-casting aluminum	 
		Finish	white /black (silver/black/gold reflector)	
	Electrical	Light efficacy	95 lm/w	
		Input voltage	AC100-240V	
		Power factor (PF)	>0.9	
	Optical	CCT	2700K/3000K/4000K/6000K	
		Led type	CREE COB	
		CRI	>80/90	
		Beam angle	15°/24°/38°	
		SDCM	<3	
	Function	Control	Non-dim./ Triac Dim. / DALI dim./ 0-10V dim.	
		Tilting angle	/	
		Rotating angle	/	
	Durability	IP grade	IP20	
		Operating Temperature	-20°C ~ +40°C	
		Lifespan	>50,000H(L90,Tc=55°C)	
		Warranty	3 years	

Model	Power	Size(mm)	Model	Power	Size(mm)
WK-DL-A-6	6W	φ68*63mm open:60mm	WK-DL-A-10	10W	φ85*80mm open:75mm
WK-DL-A-20	20W	φ105*95mm open:90mm			

Notes & Warnings:	NOTES 1, Match rated voltage with mains 2, Mount on flat, firm surface only 3, No housing covering during use 4, Use dedicated dimmer if dimming WARNINGS 1, Power off for installation/maintenance 2, No unauthorized disassembly/modification 3, Keep away from heat, fire, water splash 4, Keep out of children/pets' reach 5, No overload/incompatible accessories 6, Do not touch hot lamp body after use
Applications:	1, Residential areas: Living room, bedroom, kitchen, study, hallway 2, Commercial spaces: Office, retail store, exhibition hall, shopping mall 3, Public areas: Corridor, stairwell, waiting area, lobby 4, Service venues: Hotel, restaurant, café, clinic 5, Industrial & utility: Workshop, storage room, garage

Updated on: 202601