


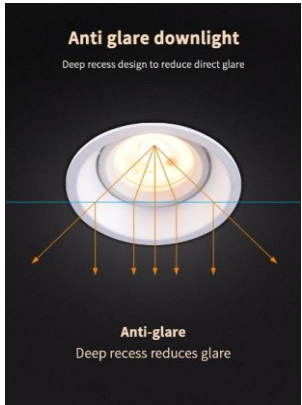

Recessed Anti-glare SMD Downlight

Product Features & Advantage	1, Recessed embedded design, simple and modern appearance. 2, Anti-glare structure with soft light output. 3, High-quality SMD LED chip, stable and reliable. 3, die-casting aluminum housing, stable performance and extended product life. 4, Uniform light, no flicker, no dark spots. 5, Conform CE, RoHS, FCC, SAA, PSE certifications.
---	---

General data	General	Material	die-casting aluminum	 
		Finish	white	
	Electrical	Light efficacy	95 lm/w	
		Input voltage	AC100-240V	
		Power factor (PF)	>0.9	
	Optical	CCT	2700K/3000K/4000K/6000K	
		Led type	SamSung 2835smd	
		CRI	>80/90	
		Beam angle	120°	
		SDCM	<3	
	Function	Control	Non-dim./ Triac Dim. / DALI dim./ 0-10V dim.	
		Tilting angle	/	
		Rotating angle	/	
	Durability	IP grade	IP20	
		Operating Temperature	-20°C ~ +40°C	
		Lifespan	>50,000H(L90,Tc=55°C)	
		Warranty	3 years	

Model	Power	Size(mm)	Model	Power	Size(mm)
WK-DL-5	5W	φ60*40mm open:55mm	WK-DL-7	7W	φ80*40mm open:75mm
WK-DL-10	10W	φ90*40mm open:85mm	WK-DL-15	15W	φ100*40mm open:95mm

Notes & Warnings:	NOTES 1, Match rated voltage with mains 2, Mount on flat, firm surface only 3, No housing covering during use 4, Use dedicated dimmer if dimming WARNINGS 1, Power off for installation/maintenance 2, No unauthorized disassembly/modification 3, Keep away from heat, fire, water splash 4, Keep out of children/pets' reach 5, No overload/incompatible accessories 6, Do not touch hot lamp body after use
Applications:	1, Residential areas: Living room, bedroom, kitchen, study, hallway 2, Commercial spaces: Office, retail store, exhibition hall, shopping mall 3, Public areas: Corridor, stairwell, waiting area, lobby 4, Service venues: Hotel, restaurant, café, clinic 5, Industrial & utility: Workshop, storage room, garage

Updated on: 202601