




LED linear tube light - T5

Product Features & Advantage	1, All-in-one design : Integrated driver & housing, no extra accessories needed, easy to install.
	2, Direct replacement for traditional T5, high luminous efficacy.
	3, Energy - saving, low power consumption.
	4, Instant start, no flicker.
	5, Wide beam angle, uniform light.
	6, Retrofit easy, no rewiring needed.
	7, Suitable for commercial/residential use.

General data	General	Material	Aluminum Housing+PC cover
		Finish	silver
	Electrical	Light efficacy	110lm/w; 120-140lm/w (optional)
		Input voltage	AC85-265V/ AC110-130V
	Optical	CCT	2700-7000K /R/G/B
		Led type	2835 smd (SamSung)
		CRI	>80/90
		Beam angle	130°
		SDCM	<3
	Function	Dimmable	No dimming/DALI ; 0/1-10V & Triac
		Other	emergency or sensor (per request)
	Durability	IP grade	IP20
		Operating Temperature	-20°C ~ +40°C
		Lifespan	>50,000H(L90,Tc=55°C)
		Warranty	3/5 years

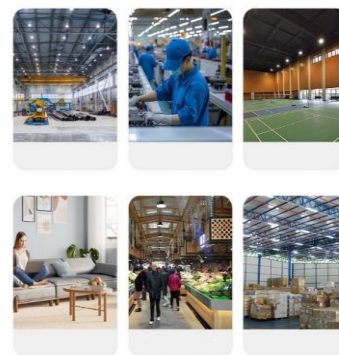

Model	Power	Size(mm)	T5 series connection (2 ways)
WK-T5-300mm	4W	(L)300* (W) 23*(H)34	
WK-T5-600mm	8W	(L)600* (W) 23*(H)34	
WK-T5-900mm	10W	(L)900* (W) 23*(H)34	
WK-T5-1000mm	12W	(L)1000* (W) 23*(H)34	
WK-T5-1200mm	14W	(L)1200* (W) 23*(H)34	

Notes & Warnings:	1, Power off before installation/maintenance. 2, Match correct input voltage. 3, Avoid direct eye contact with high-brightness models. 4, Do not disassemble or modify the tube. 5, Install in dry, well-ventilated locations. 6, Dispose of according to local electronic waste regulations. 7, Handle with care; avoid dropping or crushing.
Applications:	1, Office & commercial workspace lighting 2, Retail store display & shelf lighting 3, School & classroom illumination 4, Hospital & healthcare facility lighting 5, Residential kitchen & closet lighting 6, Warehouse & workshop general lighting 7, Supermarket & grocery store aisle lighting 7, Garage & basement ambient lighting

Updated on: 202512