


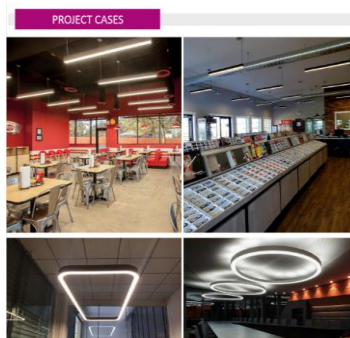

LED linear tube light - surface mounted

Product Features & Advantage	1, Tool-Free Surface Mounting – Compact, lightweight design enables direct installation on ceilings, walls or shelves without recessed grooves; compatible with screws or adhesive mounting brackets for flexible placement.
	2, Uniform Glare-Free Illumination – Integrated high-transmittance diffuser cover delivers soft, even linear light output, eliminating harsh shadows and glare to protect eyesight.
	3, Durable & Low-Maintenance Build – Constructed with fire-retardant PC shell and corrosion-resistant aluminum base for heat dissipation; IP20/IP65 rating options available to suit dry or semi-humid indoor environments (e.g., offices, retail stores, residential spaces).
	4, Versatile Dimming Options – Compatible with 0–10V dimmers or smart control systems (optional) for brightness adjustment to meet diverse scene requirements.
	5, Customized produce size - Different size for your option. Not limited the listed size in the spec.

General data	General	Material	Aluminum Housing+PMMA Diffuser	 
		Finish	white; black	
	Electrical	Light efficacy	110lm/w; 130-150lm/w (optional)	
		Input voltage	DC12V /DC24V	
	Optical	CCT	2700-7000K /R/G/B/RGB	
		Led type	2835 smd (SamSung)	
		CRI	>80/90	
		Beam angle	120°	
		SDCM	<3	
	Function	Dimmable	No dimming/DALI ; 0/1-10V & Triac	
		Other	emergency or sensor (per request)	
	Durability	IP grade	IP20/IP65	
		Operating Temperature	—20°C ~ +40°C	
		Lifespan	>50,000H(L90,Tc=55°C)	
		Warranty	3/5 years	

Model	Power	Size(mm)	Carton size	Gross Weight/ctn	Pcs/ctn
WK-T5370-300mm	4.3W	(L)300* (W) 53*(H)70	127*23*22 cm	13.6 kgs	44pcs
WK-T5370-500mm	7.2W	(L)500* (W) 53*(H)70	102*23*22 cm	10.1 kgs	22pcs
WK-T5370-1000mm	14.4W	(L)1000* (W) 53*(H)70	102*23*22cm	9.7 kgs	11pcs
WK-T5370-1500mm	21.6W	(L)1500* (W) 53*(H)70	157*23*22 cm	14 kgs	11pcs
WK-T4046-300mm	4.3W	(L)300* (W) 40*(H)46	105.5*33.5*30 cm	18.8 kgs	90 pcs
WK-T4046-500mm	7.2W	(L)500* (W) 40*(H)46	105.5*33.5*30 cm	15.8 kgs	60 pcs
WK-T4046-1000mm	14.4W	(L)1000* (W) 40*(H)46	105.5*33.5*30 cm	15.2 kgs	30 pcs
WK-T4046-1500mm	21.6W	(L)1500* (W) 40*(H)46	157*33.5*30 cm	19.2 kgs	30 pcs
We also have other sizes, please feel free to check with sales.					

Notes & Warnings:	Electrical Safety 1, Power off the circuit completely before installation, maintenance, or bulb replacement to avoid electric shock. 2, Do not disassemble or modify the internal components (e.g., LED chips, driver) without professional guidance. Installation Guidelines 1, For surface mounting, secure the fixture firmly with provided screws or brackets; avoid installing on unstable or flammable surfaces (e.g., wooden boards without fireproof treatment). 2, Maintain a minimum 10cm clearance from heat sources (e.g., heaters, stoves) to prevent overheating and lifespan reduction. 3, Do not expose the non-IP65 rated models to direct water splashes or humid outdoor environments; use only in dry/semi-humid indoor areas as specified. Usage & Maintenance 1, Avoid frequent on/off switching, as it may shorten the LED chip lifespan. 2, Clean the diffuser cover with a soft, dry cloth; do not use abrasive cleaners or chemical solvents that could scratch or corrode the surface. 3, <u>Keep the product away from sharp objects to prevent casing damage and internal component exposure.</u>
Applications:	1, Commercial spaces: Offices, retail stores, supermarkets, and showrooms (for uniform illumination of workstations, product displays, and aisles). 2, Industrial facilities: Factories, warehouses, and workshops (for bright, glare-free lighting to improve operational safety). 3, Residential areas: Kitchens, closets, living rooms, and hallways (as under-cabinet lights, strip lights, or ceiling-mounted main lights). 4, Public venues: Schools, hospitals, libraries, and subway stations (for energy-efficient, low-maintenance lighting).

Updated on: 202512