
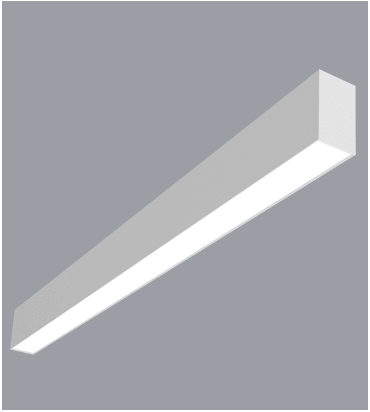


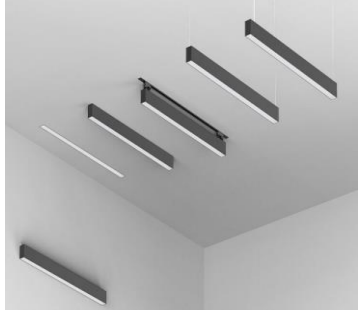

## LED linear tube light - suspension

|                                         |                                                                                                                                                                                                            |  |  |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| <b>Product Features &amp; Advantage</b> | <b>Suspended LED linear lights are sleek, modular lighting fixtures designed for surface suspension via cables or rods, ideal for commercial spaces like offices, retail stores, and exhibition halls.</b> |  |  |
|                                         | 1, Adjustable suspension height for flexible spatial adaptation.                                                                                                                                           |  |  |
|                                         | 2, Uniform, glare-free linear illumination                                                                                                                                                                 |  |  |
|                                         | 3, Customizable lengths, color temperatures (2700K–6500K) and dimming functions                                                                                                                            |  |  |
|                                         | 4, Modular design with seamless splicing; aluminum housing for efficient heat dissipation                                                                                                                  |  |  |
|                                         | 5, Space-saving, creates modern layered lighting effects                                                                                                                                                   |  |  |
|                                         | 6, Easy maintenance with quick component replacement                                                                                                                                                       |  |  |
|                                         | 7, Dual-purpose for functional lighting and decorative use in commercial spaces                                                                                                                            |  |  |

|                     |                   |                       |                                   |                                                                                                                                                                               |
|---------------------|-------------------|-----------------------|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>General data</b> | <b>General</b>    | Material              | Aluminum Housing+PMMA Diffuser    | <br> |
|                     |                   | Finish                | white; black                      |                                                                                                                                                                               |
|                     | <b>Electrical</b> | Light efficacy        | 110lm/w; 130-150lm/w (optional)   |                                                                                                                                                                               |
|                     |                   | Input voltage         | AC85-265V                         |                                                                                                                                                                               |
|                     | <b>Optical</b>    | CCT                   | 2700-6500K                        |                                                                                                                                                                               |
|                     |                   | Led type              | 2835 smd (SamSung)                |                                                                                                                                                                               |
|                     |                   | CRI                   | >80/90                            |                                                                                                                                                                               |
|                     |                   | Beam angle            | 120°                              |                                                                                                                                                                               |
|                     |                   | SDCM                  | <3                                |                                                                                                                                                                               |
|                     | <b>Function</b>   | Dimmable              | No dimming/DALI ; 0/1-10V & Triac |                                                                                                                                                                               |
|                     |                   | Other                 | emergency or sensor (per request) |                                                                                                                                                                               |
|                     | <b>Durability</b> | IP grade              | IP20                              |                                                                                                                                                                               |
|                     |                   | Operating Temperature | —20°C ~ +40°C                     |                                                                                                                                                                               |
|                     |                   | Lifespan              | >50,000H(L90,Tc=55°C)             |                                                                                                                                                                               |
|                     |                   | Warranty              | 3/5 years                         |                                                                                                                                                                               |

| Model                                                             | Power      | Size(mm)         | Accessories                                                                         |                                   |                                                                               |
|-------------------------------------------------------------------|------------|------------------|-------------------------------------------------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------|
| WK-TD5075-xx                                                      | customized | (W) 50*(H)75 mm  | FOR SUSPENDED USE                                                                   |                                   |                                                                               |
| WK-TD6075-xx                                                      |            | (W) 60*(H)75 mm  |  | SUSPENSION KIT                    | Mounting point @ every 1.5m                                                   |
| WK-TD8075-xx                                                      |            | (W) 80*(H)75 mm  |                                                                                     |                                   |                                                                               |
| WK-TD-10075-XX                                                    |            | (W) 100*(H)75 mm |                                                                                     | 3 CORE POWER CABLE                | One power feed, standard length 1.5m, longer lengths are available on request |
| WK-TD12070-XX                                                     |            | (W) 120*(H)70 mm |                                                                                     | 5 CORE POWER CABLE (FOR DALI DIM) |                                                                               |
| WK-TD15070-XX                                                     |            | (W) 150*(H)70 mm |                                                                                     |                                   |                                                                               |
| The length(300-3000mm) can be freely customized per your request. |            |                  |                                                                                     |                                   |                                                                               |
| We also have other sizes, please feel free to check with sales.   |            |                  |                                                                                     |                                   |                                                                               |

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Notes &amp; Warnings:</b> | <ol style="list-style-type: none"><li>1, Follow local electrical codes &amp; user manual for installation.</li><li>2, Match input voltage to local power supply before use.</li><li>3, Do not cover aluminum housing; avoid dust buildup.</li><li>4, Keep away from high humidity, water &amp; corrosive environments.</li><li>5, Cut off power before maintenance/cleaning; no unauthorized disassembly.</li><li>6, Do not exceed max load capacity of suspension accessories.</li></ol>                                                                                                                     |
| <b>Applicatons:</b>          | <p><b>1, Commercial spaces:</b> Offices, retail stores, supermarkets, and showrooms (for uniform illumination of workstations, product displays, and aisles).</p> <p><b>2, Industrial facilities:</b> Factories, warehouses, and workshops (for bright, glare-free lighting to improve operational safety).</p> <p><b>3, Residential areas:</b> Kitchens, closets, living rooms, and hallways (as under-cabinet lights, strip lights, or ceiling-mounted main lights).</p> <p><b>4, Public venues:</b> Schools, hospitals, libraries, and subway stations (for energy-efficient, low-maintenance lighting</p> |

Updated on: 202512